



# CHR<sup>®</sup> TAPE

## CHR<sup>®</sup> C661/C665

Specialized for Extreme Conditions

## Foil-Copper Pressure Sensitive Adhesive Tape

CHR<sup>®</sup> C661 and C665 are manufactured from electrically deposited copper foil backing with acrylic adhesive.

### Features/Benefits


The copper foil surface of C661 is electrically conductive, conformable and easy to apply. Its release liner aids in die cutting. The EMI/RFI shielding seals components from radiating or leaking interference. The copper foil and adhesive of C665 are both electrically conductive and the release liner aids in die cutting. Both C661 and C665 tapes offer solvent resistance. C661 and C665 can meet Underwriters Laboratories recognized component program Guide OANZ2, File E51201 and UL510 flame retardant specifications.

### Availability

Factory stock for C661 is in master log form 33 m x 610 mm wide. Factory stock for C665 is in master log form 610 mm width in lengths 16.5 m and 33 m. Rolls can be slit 6.35 mm to 610 mm wide. CHR<sup>®</sup> C661 and C665 are available with a liner.

### Applications

CHR<sup>®</sup> C661 tape is developed for specialty shielding applications; typically IC chips, electrical cabinets, cables motors and static dissipation. CHR<sup>®</sup> C665 tape is designed for conductivity through the entire construction.

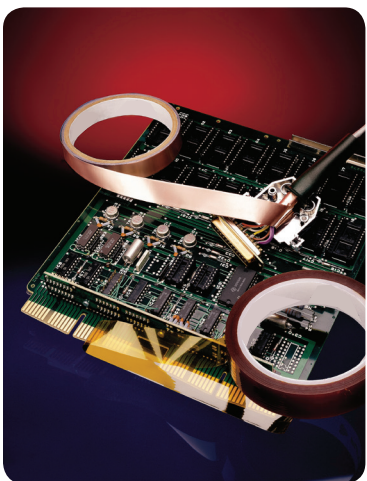

SAINT-GOBAIN

## CHR® C661/C665 Properties

Performance tests are run using standard test procedures.  
The values presented are typical values and should not be used for specification purposes.

Product Number	C661	C665
Backing Material	Foil-Copper	Foil-Copper
Adhesive Type	Acrylic	Conductive Acrylic
Total Thickness (mm)	0.089	0.089
Backing Thickness (mm)	0.038	0.038
Adhesive Thickness (mm)	0.051	0.051
Adhesion to Steel (N/cm)	8.8	3.8
Tensile Strength (N/cm)	123	123
Elongation (% at break)	16	-
Surface Resistance (ohms/in.)	-	0.0065
Volume Resistance (ohms/in.)	-	0.01
Operating Temperature (°C)	-73 to +190	-73 to +190
NASA Outgassing (%TML = 0.15%)	CVCM = 0.01	-
NASA Outgassing (%TML = 0.07%)	-	CVCM = 0.02

CHR® is a registered trademark.



### Saint-Gobain

AMERICAS  
Tel: (800) 962-2666  
(518) 686-7301

EUROPE  
Tel: +44 (0) 1706-746900

ASIA  
Tel: (886) 2-2503-4201

[www.foamsandtapes.saint-gobain.com](http://www.foamsandtapes.saint-gobain.com)

AMERICAS: 14 McCaffrey Street, Hoosick Falls, NY 12090, USA

EUROPE: Bay 3 Transpennine Industrial Estate, Gorrels Way, Rochdale, OL11 2PX, UK

ASIA: Room 302,3F-1, 147 Jianguo North Road, Section 2, Taipei, Taiwan, 104

The data and details in this document were correct and up-to-date at the time of printing and are intended to provide information on our products and their possible applications. It is the user's responsibility to obtain the latest version of the product data sheet. This data sheet is not a specification and does not assure specific product characteristics or make reference to the suitability of the product for a specific application. Because Saint-Gobain cannot anticipate or control every application, we strongly recommend testing of this product under individual application conditions. The application, use and conversion of this product are the user's responsibility.

Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse or inability to use this product(s).

SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform their own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.

C661&C665-EN-CHREU-RR-1605

©2016 Saint-Gobain Performance Plastics